




SY235CLR

Hydraulic Excavator

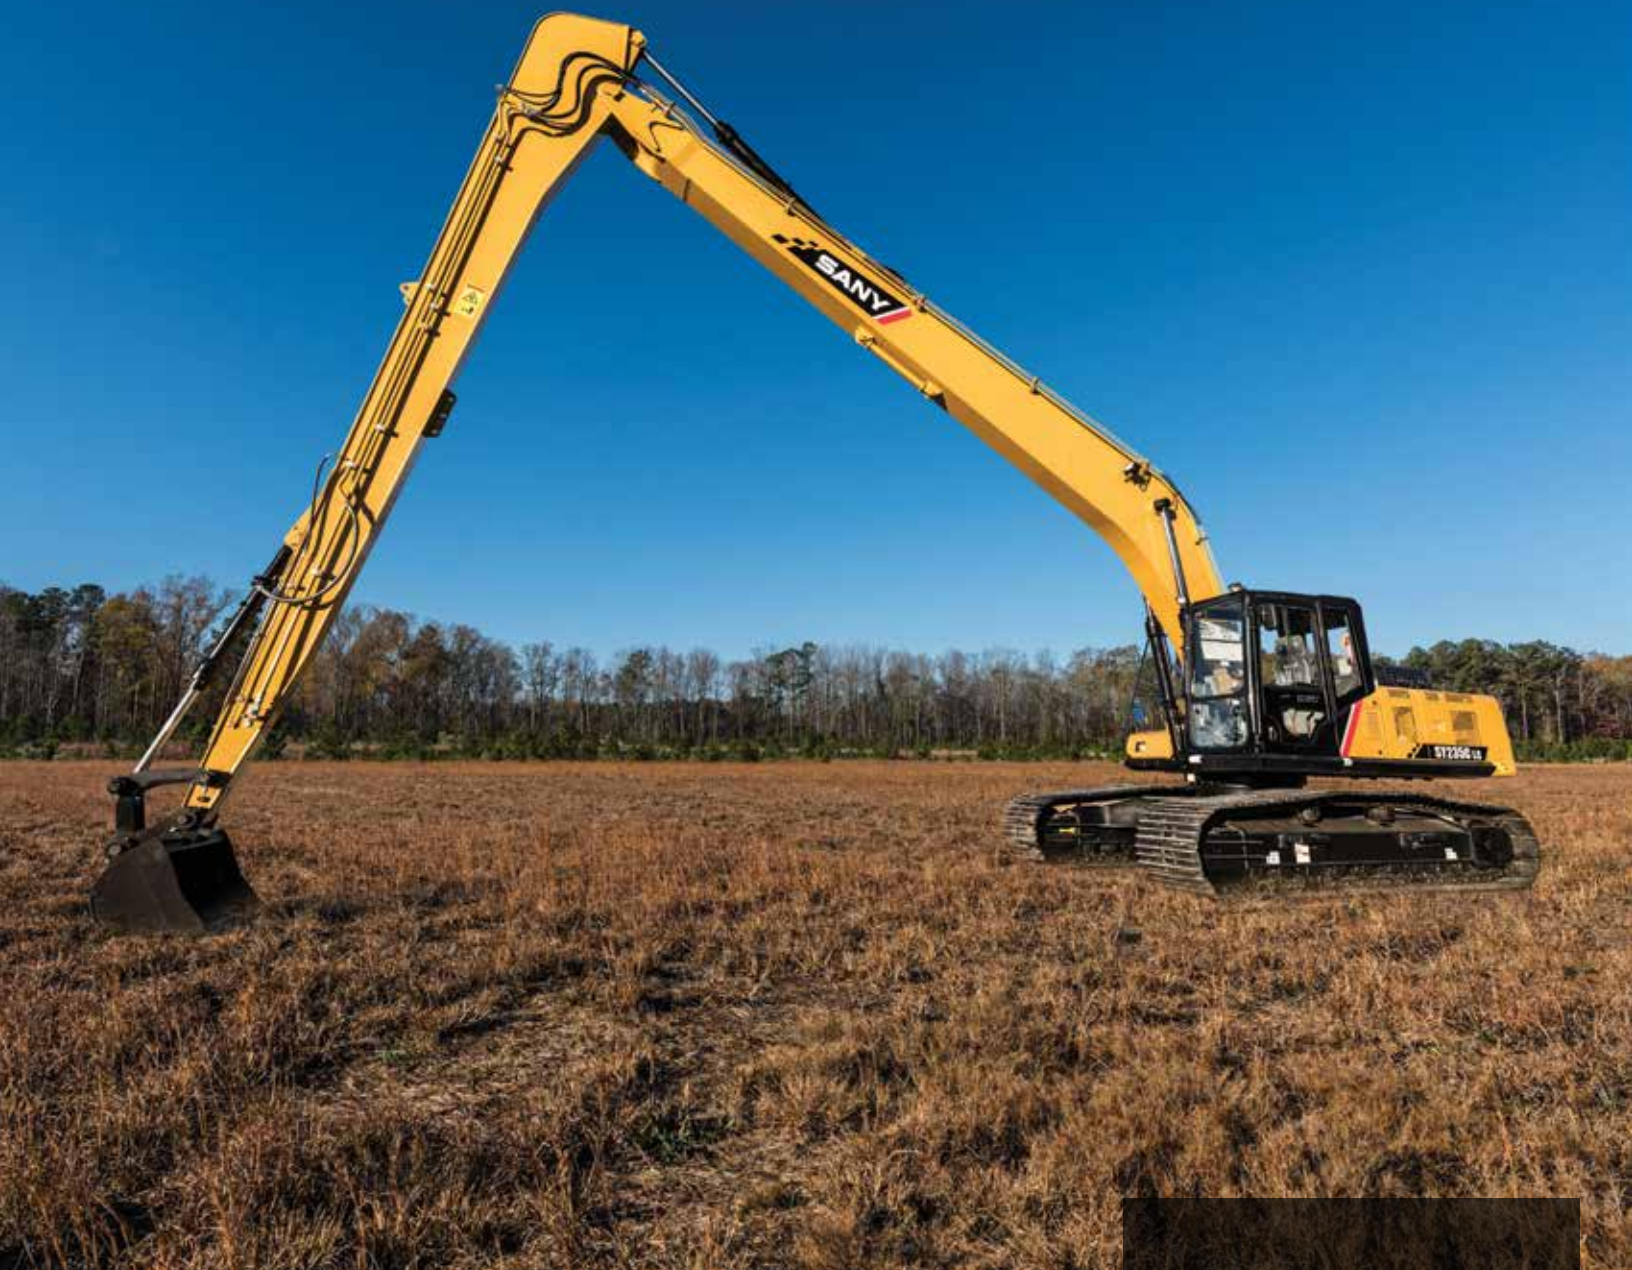

KEY FEATURES

- Equipped with a powerful and efficient Cummins QSB6.7 Tier 3 engine with an intelligent hydraulic system to match engine response
- X-beam design uses a high strength box-section structure for maximum durability and excellent torsion-resistant performance
- Precision tuned hydraulics for smooth operation with super long reach
- Two-way auxiliary hydraulics are standard

Total Weight

27,000 Kg - 59,525 lb



Rated Power

28.5 kW/2,100 rpm -
172 hp/2,100 rpm

Bucket Digging Force

88.4 kN - 19,873 lb

SY235CLR Dimensions & Specifications

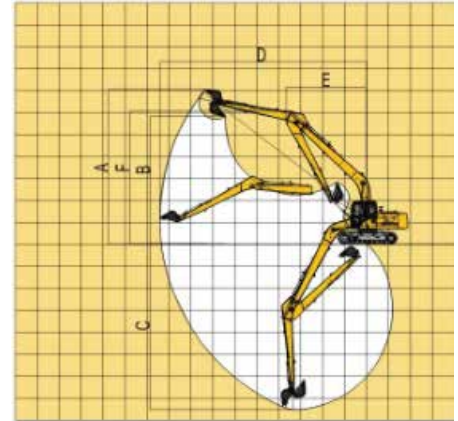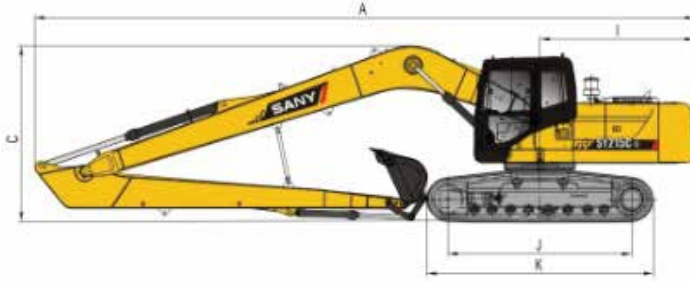

OVERALL DIMENSIONS

	Standard	Metric
A Transport Length	45' 3"	13,790 mm
B Transport Width	10' 5"	3180 mm
C Transport Height	11' 6"	3350 mm
D Upper Width	8' 11"	2710 mm
E Cab Height	10' 0"	3050 mm
F Track Shoe Width (standard)	2' 8"	800 mm
G Track Gauge	9' 6"	2890 mm
H Minimum Ground Clearance	1' 7"	480 mm
I Tail Swing Radius	9' 6"	2890 mm
J Length Center Idler to Center Sprocket	12' 7"	3830 mm
K Track Length	15' 2"	4635 mm
Boom Length	32' 2"	9800 mm
Arm Length (standard)	24' 7"	7500 mm

WORKING RANGE

	Standard	Metric
a Maximum Digging Height	46' 2"	14,070 mm
b Maximum Dumping Height	38' 9"	11,820 mm
c Maximum Digging Depth	46' 7"	14,190 mm
d Maximum Vertical Wall Digging Depth	58' 4"	17,770 mm
e Minimum Swing Radius	21' 5"	6,528 mm
f Maximum Height at Minimum Swing Radius	36' 2"	11,010 mm

MACHINE PARAMETERS

Operating Weight	60,960 lb (27,650 kg)
Engine Type	Cummins QSB6.7 T3
Engine Max Power (Gross)	195 hp (145 kW) @ 1950rpm
Max Bucket Capacity	0.8 yard ³ (0.6 meter ³)
Auxiliary lines	Standard

LIFTING CAPACITIES

Load Point Height	Load Radius										At Max. Reach		
	9.8 ft (3.0 m)		19.7 ft (6.0 m)		29.5 ft (9.0 m)		39.4 ft (12.0 m)		49.2 ft (15.0 m)				
													feet (meter)
29.5 (9.0)	lb kg										*1907 *865	*1907 *865	46.8 (14.8)
19.7 (6.0)							4797 2176	4797 2176	*2899 *1315	*2899 *1315	*1731 *785	*1731 *785	52.3 (15.9)
9.8 (3.0)					*5847 *2652	*5847 *2652	5880 2677	5880 2677	*3371 *1529	2901 1316	*1596 *724	*1596 *724	53.9 (16.4)
0 (0)	*8236 *3736	*8236 *3736	*14,321 *6496	*14,321 *6496	*5935 *2692	*5935 *2692	6568 2979	7169 3252	*3990 *1810	2654 1204	*1863 *845	*1863 *845	53.6 (16.3)
-9.8 (-3.0)	*11,505 *5219	*11,505 *5219	*16,806 *7623	13,614 6175	8532 3870	*9773 *4433	6243 2832	8303 3766	*4952 *2246	2500 1134	*3583 *1625	2028 920	51.5 (15.7)
-19.7 (-6.0)	*15,532 *7045	*15,532 *7045	*17,917 *8127	15,091 6845	9381 4255	*10,948 *4966	6111 2772	8671 3933			*4316 *1958	2789 1265	47.3 (14.7)
-29.5 (-9.0)	*20,360 *9235	*20,360 *9235	*18,177 *8245	16,751 7598	9531 4323	*11,102 *5036	6261 2840	8830 4005			*6272 *2845	3891 1765	40.4 (12.3)
-39.4 (-12.0)	*22,591 *10247	*22,591 *10247	*18,397 *8345	15,752 7145							*7712 *3498	6823 3095	28.7 (8.7)

Notes: (1) Ratings are based on ISO 10576. (2) Lift capacity of the SY235CLR Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity not including the use of power boost. (3) The load point is the centerline of the bucket pivot mounting pin on the arm. (4) *Indicates load limited by hydraulic capacity. (5) 0 m = Ground level.



Rating over-front



Rating over-side

SANY America Inc.

318 Cooper Circle | Peachtree City, GA 30269

T: 678-251-2810 | F: 770-632-7820

www.sanyamerica.com

