



PRODUCT SPECIFICATIONS TELEHANDLER ||| STH1056A

PERFORMANCE

PERFORMANCE		
Maximum Lift Capacity	10,000 lbs	4 536 kg
Lift Capacity at Maximum Height	5,000 lbs	2 268 kg
Lift Capacity at Maximum Reach	3,000 lbs	1 361 kg
Boom (Raise/Lower)	14 seconds / 11 seconds	
Boom (Extend/Retract)	16 seconds / 15 seconds	
Frame Leveling	+/- 10 degrees	
Maximum Drive Speed	14 mph	22.5 kph
Outside Turning Radius (4WS)	14' 1"	4.30 m
Auxiliary Hydraulic Flow	17 gpm	63 L/min
Auxiliary Hydraulic Pressure	3,916 psi	27 MPa
Standard Tire Size	14.00-24	

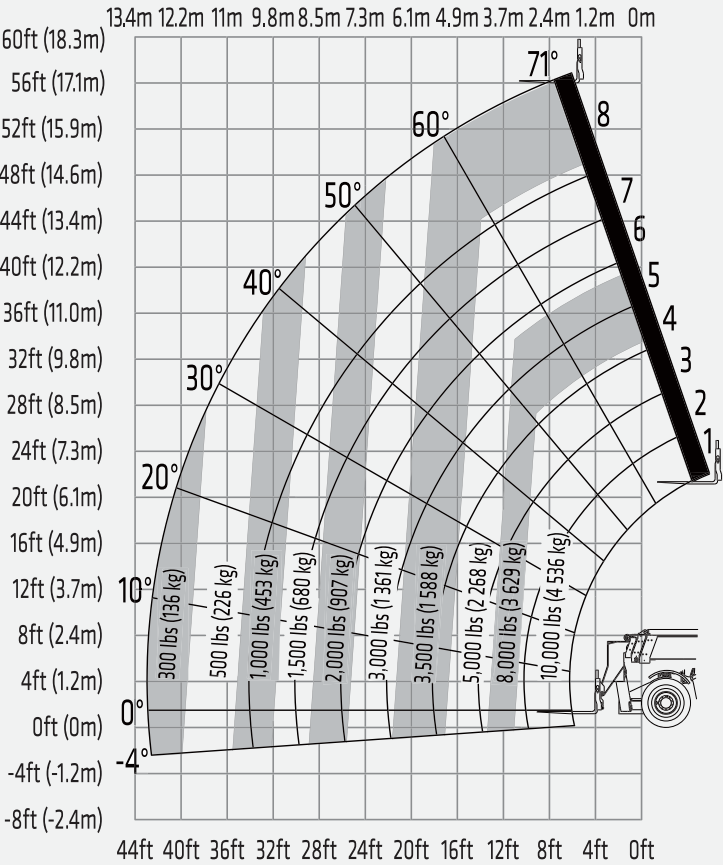

Outriggers Up

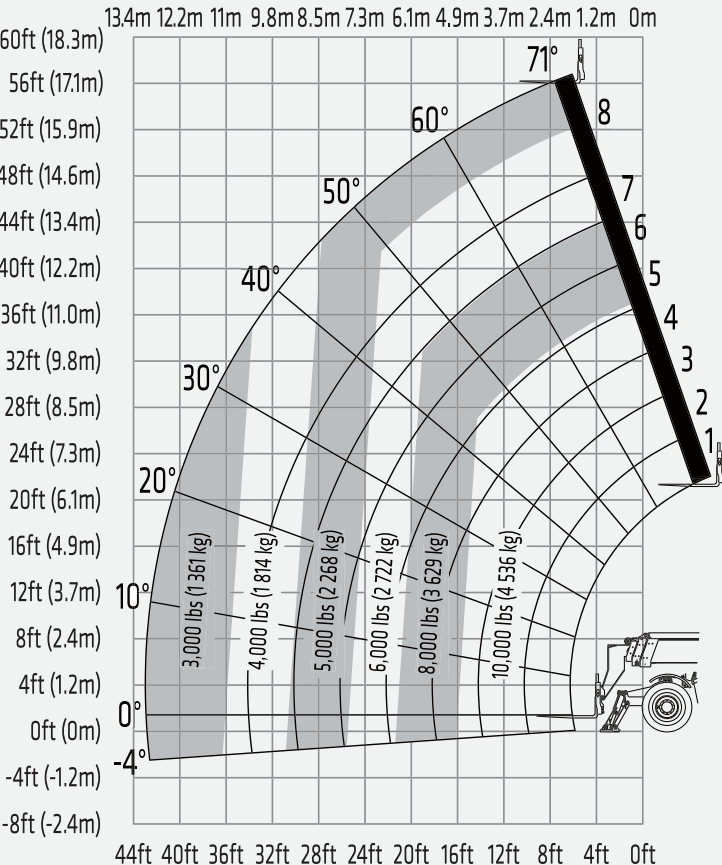

Outriggers Down



PRODUCT SPECIFICATIONS





TELEHANDLER ||| STH1056A

STANDARD FEATURES

- ➔ Configured as 74hp (no DEF) or 121 hp
- ➔ Wide angle rear view camera
- ➔ Reverse object detection
- ➔ Axle mounted stabilizers
- ➔ Powerful Deutz engine

121 hp
Gross Power
56' 2"
Max Lift Height
10,000 lbs
Max Lift Capacity
33,290 lbs
Operating Weight

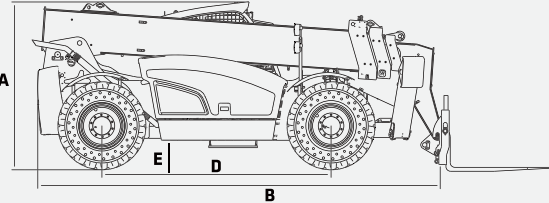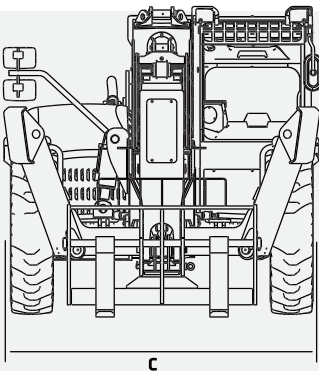

DIMENSIONS

DIMENSIONS		
Maximum Lift Height	56' 2"	17.13 m
Maximum Forward Reach	42' 11"	13.08 m
A Height, Stowed	8' 5"	2.56 m
B Length, Stowed (without Forks)	20' 7"	6.28 m
C Width	8' 6"	2.59 m
D Wheelbase	11' 5"	3.49 m
E Ground Clearance (Center)	1' 6"	0.46 m
Ground Clearance (Axle)	1' 6"	0.45 m
Weight	33,290 lbs	15,100 kg

TECHNICAL SPECIFICATIONS

CAPACITIES		
Power	121 hp	90 kW
Torque	354 lbf-ft	480 Nm
Electrical System	24 volt	
Hydraulic Tank Capacity	33 gal	124 L
Hydraulic System Capacity (with Tank)	42 gal	159 L
Fuel Tank Capacity	36 gal	135 L
COMPONENTS		
Engine	Deutz TCD3.6	
Transmission	Dana 1120VDT	
Axles F/R	Dana 223 / 212	
Hydraulic Pump	Kawasaki Load Sense Piston Pump	
Hydraulic Manifold	Parker	

PRODUCT SPECIFICATIONS TELEHANDLER ||| STH1056A

SANY

STANDARD AND OPTIONAL EQUIPMENT

s = standard / o = optional

STH1056A	ENGINE
s	Exhaust aftertreatment (DOC+SCR (DEF required))
	POWERTRAIN
o	Foam-filled tires, air tires
s	Powershift transmission
s	Planetary limited slip axles
s	Full-time 4 wheel drive
s	Gear selector lever (Steering-column)
s	Manual shift
s	Service brake, Servo-assisted, hydraulically oil-immersed multi-disc on front and rear axle
s	Parking brake, oil immersed disc type, SAHR
s	Cushioned solid tires
	HYDRAULIC
s	Full variable load-sensing system
s	Single electric over hydraulic joystick controls
s	Axial piston pump
s	Hydraulic quick coupler lines for auxiliary hydraulics
s	Self-leveling forks
s	Three driver-selectable steering modes (2W, 4W, 4W-Crab)
	CABIN
s	ISO certified ROPS/FOPS Canopy
s	Emergency hammer (closed cabin only)
s	Rubber isolated cab mounts

PRODUCT SPECIFICATIONS TELEHANDLER ||| STH1056A

SANY

STANDARD AND OPTIONAL EQUIPMENT

s = standard / o = optional

STH1056A	CABIN (CONTINUED)
s	Fully enclosed cab with automatic heat and air conditioning
s	Digital instrument display
s	Mechanical suspension seat
s	Seat belt, 3 inch retractable
s	Dual armrests
s	Rear-view camera
s	2-speed fan
s	Dedicated display for rear-view camera
	ELECTRICAL
s	24v electrical system
s	2-12 volt batteries
	PRODUCTIVITY
o	Block heater(below -20°C)
o	Cold weather package(below -40°C)
o	PAS(Positive Air Shutoff)
o	Road light with turning signals
o	72''/6 ft tyne
o	bucket 1.96 yd³
s	60''/5 ft tyne
s	Back up camera
s	Reverse sensing system
s	Full 4-wheel fender package
s	LED work lights on cab and boom
s	Flashing beacon
s	Lifting hook
s	Frame leveling 10 degrees side to side
s	Rear-Axle stabilization system
s	Axle-mounted front stabilizers



*Warranty applies to Telehandler only.



sanycanada.com